

Pumps PL

SMALL PUMP FOR OUTSTANDING RESULTS!



Above-ground and in-ground pools up to 68 m³

Wide range

230V-50Hz SINGLE

Powerline by Hayward®

Powerline by Hayward®



ASSETS

- High-performance for everyone
- Incomparable quality for an unbeatable price!
- A compact pump that will meet all your needs
- Silent operation
- Produces no noise disturbance
- Ideal for small pools and above-ground pools up to 68 m³
- Prefilter size: 1.1L

IDEAL FOR SMALL AND MID SIZE POOLS

- Easy maintenance thanks to its transparent cover and large strainer
- Winterize your pump in a single movement using its drain plug
- Easy installation (fittings included with the pump)
- Compatible with water treatment by salt chlorination
- Pump shaft in stainless steel
- 50 mm outlet and ø 32/38 mm fluted adapters
- **Power cable included**
- Self-priming pump with fully enclosed, ventilated engine
- Wide range available, single-phase 0.25 to 1.5 HP





- 50 mm outlet and ø 32/38 mm fluted adapters
- Easy-open strainer thanks to its twist-lock cover
- Drain release plug for easy winterizing



Item	Type HP	Total length A (mm)	Weight (Kg)	I/O (mm)	Flow Rate* (m ³ /h)	P1 Max (W) (Maximum consumption of the pump)	Nominal power of the motor (W)	Amps at P1 Max (A)	Quantity per pallet
SINGLE PHASE PUMP PL									
81002E2	0.25	504	7.9	50 and 32/38	6.5	360	235	1.6	32
81003E2	0.33	504	7.9	50 and 32/38	6.25	460	330	2	32
81004E2	0.5	504	8.8	50 and 32/38	9.71	580	440	2.6	32
81005E2	0.75	504	9.8	50 and 32/38	13	730	585	3.2	32
81006E2	1	504	9.8	50 and 32/38	15	860	690	3.8	32
81007E2	1.5	540	12.3	50 and 32/38	18.75	1 050	860	4.6	32

* 8 m water column pressure, except for 81002E2, given at 6 m water column pressure

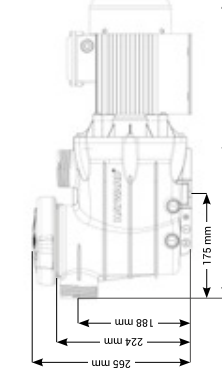

Technical Specifications	
Max. water temp.	35°C
Adapter	32/38 mm
Mechanical seal	ANSI 304 S, compatible with salt treatment (salt chlorinator)
Motor specifications	Class F, IP55, 50Hz, 2 Poles
Housing/impeller/strainer/lid	PP-GF/Noryl® + GF/ABS/PC
Prefilter size	1.1L

